



High-quality, architecturally pleasing, innovative access doors for walls, ceilings, ducts, floors and roofs



DUCT DOORS for high pressure ducts

CD-5080-HP

Application



- Economical access to high pressure ducts

Product Features

- These doors are for use in high pressure ducts up to 8" static pressure. Pressure rated to 8"W.G. with leakage no greater than 2 CFM per sq. ft. or less.
- 5/8" notched knock over tabs on the inside of the frame provide for easy installation

Options:

- ALUMINUM
- STAINLESS STEEL

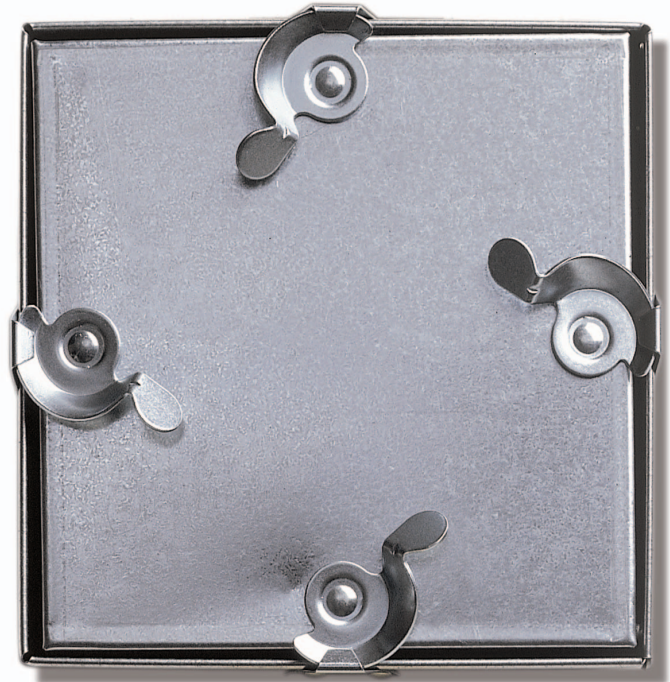

CD-5080-HP Duct Access Door Specifications:

Door: 24 gauge galvanized steel, double panel with high temperature glue

Frame: 24 gauge galvanized steel with 5/8" notched knock over tabs

Insulation: Door panel filled with 2" fiberglass insulation (7.7 R factor), compressed into 1".

Gasketing: 1/4" thick by 1/2" wide closed cell neoprene gasketing between door and frame. 1/8" thick by 1/2" wide closed cell neoprene gasketing between frame and duct

Latch: Self tightening, hand operated cam latch

AVAILABLE SIZES (Special sizes available upon request)

NOMINAL DOOR SIZE W X H		WEIGHT PER DOOR	
inches	mm	lbs.	kg.
6 X 6	150 X 150	1.25	0.6
8 X 8	200 X 200	1.75	0.8
10 X 10	250 X 250	2.75	1.3
12 X 12	300 X 300	3.75	1.7
14 X 14	350 X 350	4.75	2.2
16 X 16	400 X 400	5.25	2.4
18 X 18	450 X 450	6.75	3.1
20 X 20	500 X 500	9.0	4.1
24 X 24	610 X 610	12.0	5.5

Duct opening is 1 1/4" or (31 mm) smaller than door
For detailed specifications see submittal sheet

