



High-quality, architecturally pleasing, innovative access doors for walls, ceilings, ducts, floors and roofs



# FIRE RATED for WALLS - Recessed for Tile

## FB-5060-TD

### Application

- Designed for use in tiled walls
- Used whenever it is necessary to provide access in fire rated walls, when temperature rise is not a factor

### Product Features

- Recessed 1/2" and is lined with self-furring lath
- Designed to maintain continuity in a 2-hour fire barrier wall
- Self closing
- Self latching
- Inside latch release

### FB-5060 Access Door Specifications:

**Door:** Steel: 16 gauge door with reinforced edges, door panel recessed 1/2" and lined with self-furring lath.


**Door Frame:** Steel: 16 gauge mounting frame

**Hinge:** Continuous exposed piano hinge

**Fire Rating:** UL — 1-1/2 hour "B" label. ULC — 2 hour "B" label. (optional)

**Standard Latch:** Universal self-latching bolt, operated by either a knurled knob or flush key. When master keying is required, doors can be prepared for rim or mortise cylinder locks.

**Finish:** Steel: 5 stage iron phosphate preparation with prime coat of White alkyd baking enamel. Stainless Steel: #4 satin polish.

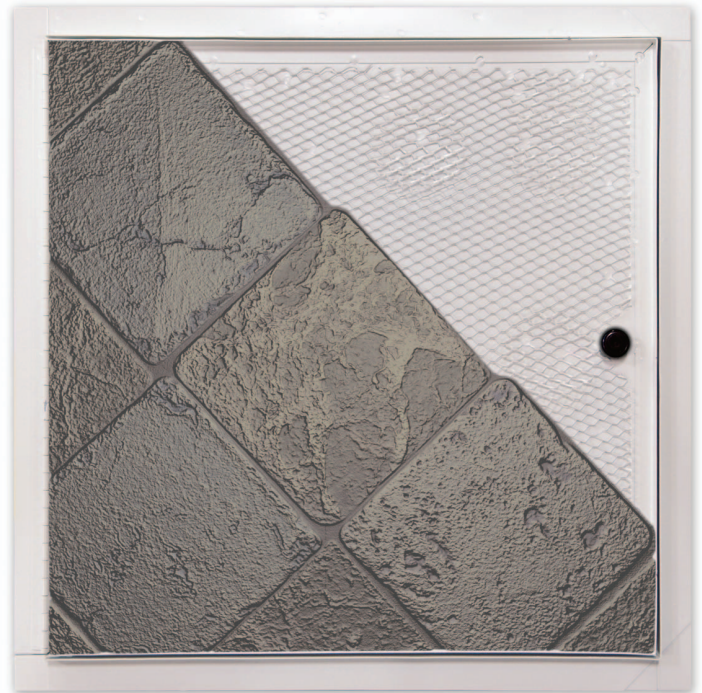

### AVAILABLE SIZES (Special sizes available upon request)

| NOMINAL DOOR SIZE W X H |           | WEIGHT PER DOOR |      |     |
|-------------------------|-----------|-----------------|------|-----|
| inches                  | mm        | Latches         | lbs. | kg. |
| 12 X 12                 | 305 X 305 | 1               | 8.3  | 3.8 |
| 18 X 18                 | 457 X 457 | 1               | 14.3 | 6.5 |
| 24 X 24                 | 610 X 610 | 1               | 20.3 | 9.2 |

Wall opening is W + 3/8" (9 mm)

For detailed specifications see submittal sheet

